

PLASTIM ELEKTRİK was established in 2008 and today is among the leading manufacturers of ABS Electrical Panels, Electrical Panel Climatisation Products, Slotted Cable Ducts, Heaters etc. in Turkey. PLASTIM currently exports to more than 50 countries worldwide.

Its product range has also been constantly widened to suit the various requirements of its customers. It has a primary goal of providing customers with the best service in satisfying their industrial needs. To fulfil this purpose, the company always pushes to enhance its and research development (R & D) activities so that new products of high-quality can be added to its portfolio.






From Turkey to **worldwide**



www.plastim.com.tr

Contents

Cable Management.....	05-08
Electrical Distribution.....	09-13
Ventilation.....	14-23
Control.....	24-28
Air Conditioning.....	29-30
Heating.....	31-35
Panel Accessories.....	36
Distribution Blocks.....	37
Copper Tubular Cable Lugs.....	38
Din Rails and Support.....	39
Cable Terminals.....	40-45
PBO Push Button Series.....	46-50
Industrial Fans.....	51-54
Manholes.....	55-60


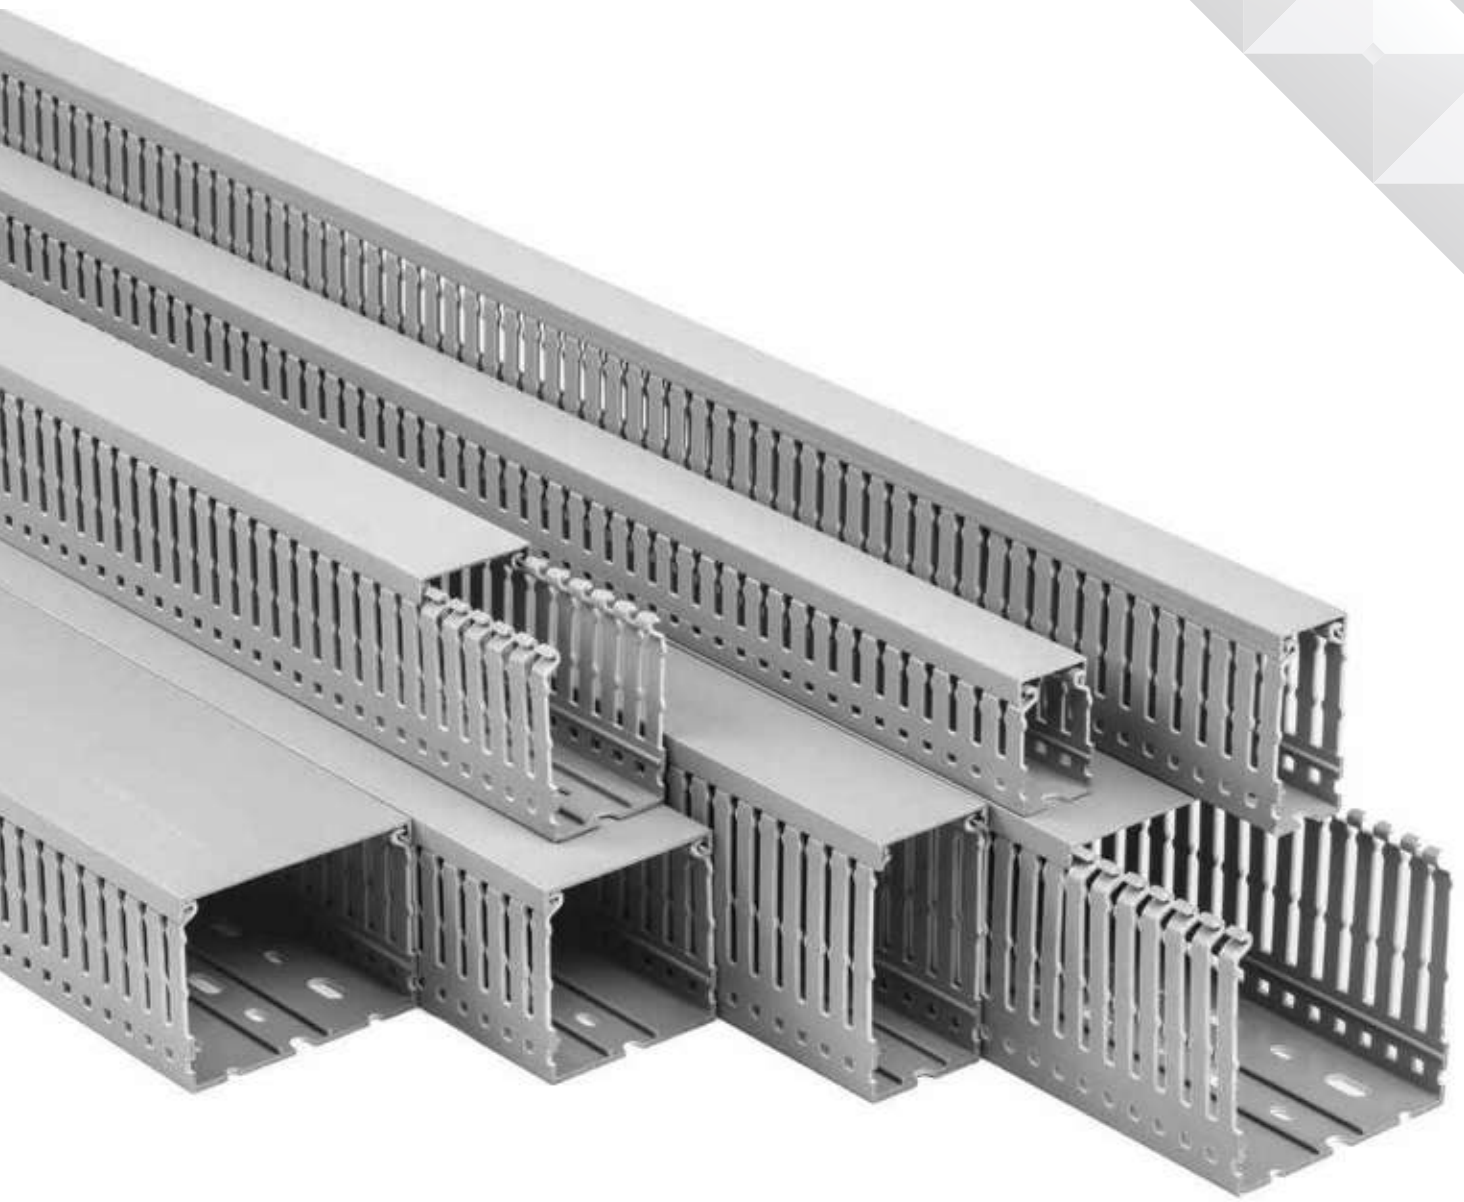


CABLE MANAGEMENT





Upper Scorelines

The pre-scored upper lines at the base of the ducts provide easy breaking off the ribs as a result of 90 degree bending without using any hand tool.



Lower Scorelines

Lower scorelines at the base enable to remove the whole trunking wall.



Bottom Rails


You can easily mount the accessories on the bottom rails of the duct.



Special Cover Design

The cover design lets you easily assemble and disassemble the cover regardless in whatever position the duct is installed.

PLASTİM PDK6060 RoHS CE EN50085 2-3 MADE IN TURKEY

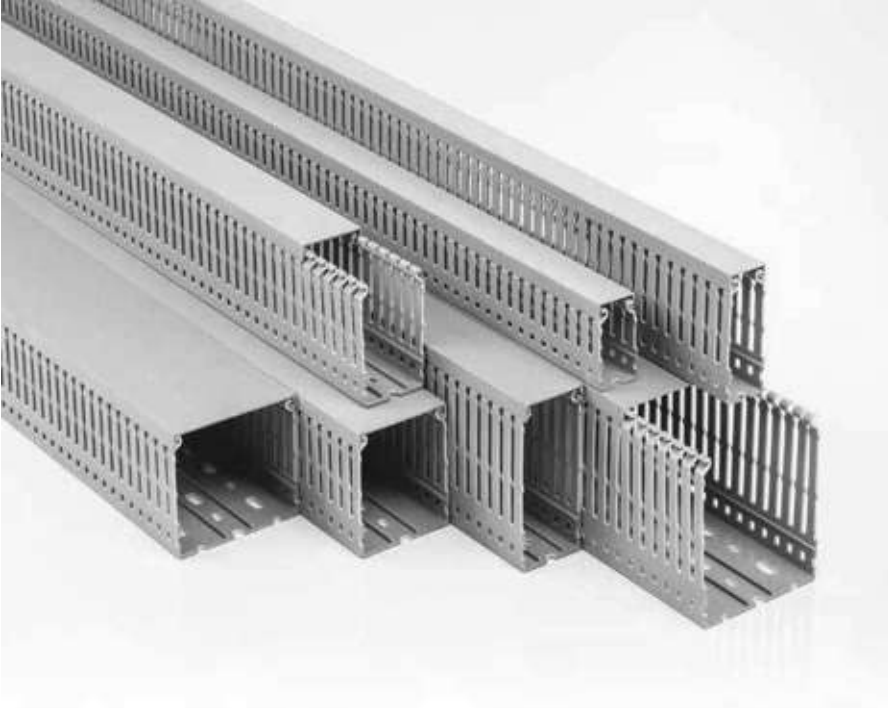

SLOTTED TYPE WIRING DUCTS

MAIN TECHNICAL FEATURES:

- Made of: technopolymer on rigid PVC base, self-extinguishing (UL94) V0
- Narrow slots 4/6/4mm + 5/8/5mm
- Perforated bottom according to the standard DIN 43659
- Standard bars length: 2m
- Reference Standards: EN 5085-2-3
- Packed in strong cardboard boxes suitable for transport and storage
- Standard colour RAL7030, other colours on request
- **CE** RoHS



SLOTTED WIRING DUCTS

Code	External Dimensions (mm)	Slot Range (mm)	Colour	Packaging
PDK 2540	25x40	4/6/4 mm	RAL 7030 Grey	64x2m
PDK 2560	25x60	4/6/4 mm	RAL 7030 Grey	48x2m
PDK 2580	25x80	4/6/4 mm	RAL 7030 Grey	32x2m
PDK 4040	40x40	4/6/4 mm	RAL 7030 Grey	35x2m
PDK 4060	40x60	4/6/4 mm	RAL 7030 Grey	30x2m
PDK 4080	40x80	4/6/4 mm	RAL 7030 Grey	20x2m
PDK 4010	40x100	5/8/5 mm	RAL 7030 Grey	20x2m
PDK 6040	60x40	4/6/4 mm	RAL 7030 Grey	25x2m
PDK 6060	60x60	4/6/4 mm	RAL 7030 Grey	24x2m
PDK 6080	60x80	4/6/4 mm	RAL 7030 Grey	16x2m
PDK 6010	60x100	5/8/5 mm	RAL 7030 Grey	16x2m
PDK 8060	80x60	4/6/4 mm	RAL 7030 Grey	14x2m
PDK 8080	80x80	4/6/4 mm	RAL 7030 Grey	12x2m
PDK 8010	80x100	5/8/5 mm	RAL 7030 Grey	12x2m
PDK 1060	100x60	4/6/4 mm	RAL 7030 Grey	10x2m
PDK 1080	100x80	4/6/4 mm	RAL 7030 Grey	10x2m
PDK 1010	100x100	5/8/5 mm	RAL 7030 Grey	8x2m
PDK 1260	120x60	4/6/4 mm	RAL 7030 Grey	10x2m
PDK 1280	120x80	4/6/4 mm	RAL 7030 Grey	8x2m

WIRING DUCT ACCESSORIES

WIRING DUCT COVERS

CODE	DIMENSIONS (mm)	COLOUR	PACKAGING
PDC 25	25	RAL 7030 Grey	50 Pcs
PDC 40	40	RAL 7030 Grey	50 Pcs
PDC 60	60	RAL 7030 Grey	50 Pcs
PDC 80	80	RAL 7030 Grey	50 Pcs
PDC 100	100	RAL 7030 Grey	50 Pcs
PDC 120	120	RAL 7030 Grey	50 Pcs



WIRING DUCT CABLE RETAINERS

CODE	DIMENSIONS (mm)	COLOUR	PACKAGING
PKT 4040	40X40	RAL 7030 Grey	10 Pcs
PKT 4060	40x60	RAL 7030 Grey	10 Pcs
PKT 6060	60x60	RAL 7030 Grey	10 Pcs



WIRING DUCT CUTTING TOOL

CODE	MAX. CUTTING SIZE	PACKAGING
PDC 110	110mm	1 Pc





ELECTRICAL DISTRIBUTION

PLASTIC DISTRIBUTION BOARDS GREY DOOR



MAIN TECHNICAL FEATURES

- Resistance: Chemical agents, alkali, oils, salts, etc.
- Rated Voltage: Up to 690V
- Maximum Current: Up to 800A
- Operating Temperature: -35°C + 65°C
- Material: HB ABS
- Mounting Plate: Galvanised steel 1mm
- IP Degree: IP65
- IK Degree: IK08
- Colour: RAL7035 Grey (Other colours on request)
- **CE** RoHS



Polyurethane Sealing  IP65



PLASTIC DISTRIBUTION BOARDS - GREY DOOR

CODE	L (mm)	W (mm)	H (mm)	WEIGHT(kg)
PP3001	200	300	130	1.70
PP3002	250	350	150	2.20
PP3004	300	400	170	3.00
PP3005	300	400	220	3.40
PP3006	350	500	190	4.30
PP3003	400	500	175	4.30
PP3007	400	500	240	5.60
PP3008	400	600	200	6.00
PP3010	500	700	250	10.10
PP3021	600	800	260	13.50

PLASTIC DISTRIBUTION BOARDS **TRANSPARENT DOOR**



MAIN TECHNICAL FEATURES

- Resistance: Chemical agents, alkali, oils, salts, etc.
- Rated Voltage: Up to 690V
- Maximum Current: Up to 800A
- Operating Temperature: -35°C + 65°C
- Material: HB ABS + Polycarbonate (Doors)
- Mounting Plate: Galvanised steel 1mm
- IP Degree: IP65
- IK Degree: IK08
- Colour: RAL7035 Grey body, transparent door (Other colours on request)
- **CE** RoHS



Polyurethane
Sealing



PLASTIC DISTRIBUTION BOARDS - TRANSPARENT DOOR

CODE	L (mm)	W (mm)	H (mm)	WEIGHT(kg)
PP3011	200	300	130	1.70
PP3012	250	350	150	2.20
PP3014	300	400	170	3.00
PP3015	300	400	220	3.40
PP3016	350	500	190	4.30
PP3013	400	500	175	4.30
PP3017	400	500	240	5.60
PP3018	400	600	200	6.00
PP3020	500	700	250	10.10
PP3022	600	800	260	13.50

MODULAR DISTRIBUTION BOARDS GREY DOOR



MAIN TECHNICAL FEATURES

- Resistance: Chemical agents, alkali, oils, salts, etc.
- Rated Voltage: Up to 690V
- Maximum Current: Up to 800A
- Operating Temperature: -35°C + 65°C
- Material: HB ABS
- IP Degree: IP65
- IK Degree: IK08
- Colour: RAL7035 Grey (Other colours on request)
- **CE** RoHS



Polyurethane Sealing  IP65



MODULAR DISTRIBUTION BOARDS - GREY DOOR

CODE	L (mm)	W (mm)	H (mm)	MCB Qty	WEIGHT(kg)
PP3102	250	350	150	18 (9x2)	2.50
PP3104	300	400	170	24 (12x2)	3.40
PP3106	350	500	190	45 (15x3)	4.50
PP3108	400	600	200	60 (15x4)	6.00

MODULAR DISTRIBUTION BOARDS TRANSPARENT DOOR



MAIN TECHNICAL FEATURES

- Resistance: Chemical agents, alkali, oils, salts, etc.
- Rated Voltage: Up to 690V
- Maximum Current: Up to 800A
- Operating Temperature: -35°C + 65°C
- Material: HB ABS + Polycarbonate (Doors)
- IP Degree: IP65
- IK Degree: IK08
- Colour: RAL7035 Grey body, transparent door (Other colours on request)
- **CE** RoHS



Polyurethane
Sealing



MODULAR DISTRIBUTION BOARDS - TRANSPARENT DOOR

CODE	L (mm)	W (mm)	H (mm)	MCB Qty	WEIGHT(kg)
PP3112	250	350	150	18 (9x2)	2.50
PP3114	300	400	170	24 (12x2)	3.40
PP3116	350	500	190	45 (15x3)	4.50
PP3118	400	600	200	60 (15x4)	6.00



DESIGN SERIES ROOF FANS




IP65



Polyurethane
Sealing



Radial
Fan



V0 Abs Flame
Retardant



Fast Clip
On



plastim[®]

DESIGN





VENTILATION



ROOF FANS


MODELS	UNIT	PFF4000	PFF5500	PFF6000
AIR FLOW RATE	m ³ /h	400	560	970
POWER SUPPLY	V/Hz	230V 50-60Hz	230V 50-60Hz	230V 50-60Hz
DIMENSIONS	mm	364x364x107	364x364x107	364x364x107
POWER CONSUMPTION	W	25/32	58/75	85/90
CURRENT CONSUMPTION	A	0.11/0,15	0.26/0.34	0.38/0.44
OVERCURRENT PROTECTION	-	THERMAL	THERMAL	THERMAL
ELECTRICAL CONNECTION	-	3-POLE TERMINAL 2.5mm ²	4-POLE TERMINAL 2.5mm ²	4-POLE TERMINAL 2.5mm ²
OPERATING TEMPERATURE	°C	-10/+70	-10/+70	-10/+70
PROTECTION DEGREE	-	IP54	IP54	IP54
NOISE LEVEL	dB(A)	57(61)	62 (64)	72 (73)
FLOW DIRECTION	-	INSIDE / OUT	INSIDE / OUT	INSIDE / OUT
BEARING	-	BALL	BALL	BALL
SERVICE LIFE	Hour	50.000	50.000	50.000
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT	UL94 V0 ABS FLAME RETARDANT	UL94 V0 ABS FLAME RETARDANT
GASKET	-	POLYURETHANE SEALING	POLYURETHANE SEALING	POLYURETHANE SEALING
WEIGHT	kg	2.68	3.16	3.74
MOUNTING	-	8 PCS M4 SCREWS	8 PCS M4 SCREWS	8 PCS M4 SCREWS
CONFORMITY	-	CE	CE	CE





ROOF FANS

MODELS	UNIT	PTS4000	PTS5500	PTS6000
AIR FLOW RATE	m ³ /h	400	560	970
POWER SUPPLY	V/Hz	230V 50-60Hz	230V 50-60Hz	230V 50-60Hz
DIMENSIONS	mm	364x364x107	364x364x107	364x364x107
POWER CONSUMPTION	W	25/32	58/75	85/90
CURRENT CONSUMPTION	A	0.11/0.15	0.26/0.34	0.38/0.44
OVERCURRENT PROTECTION	-	THERMAL	THERMAL	THERMAL
ELECTRICAL CONNECTION	-	3-POLE TERMINAL 2.5mm ²	3-POLE TERMINAL 2.5mm ²	3-POLE TERMINAL 2.5mm ²
OPERATING TEMPERATURE	°C	-10/+70	-10/+70	-10/+70
PROTECTION DEGREE	-	IP54	IP54	IP54
NOISE LEVEL	dB(A)	62 (64)	62 (64)	72 (73)
FLOW DIRECTION	-	INSIDE / OUT	INSIDE / OUT	INSIDE / OUT
BEARING	-	BALL	BALL	BALL
SERVICE LIFE	Hour	50.000	50.000	50.000
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT	UL94 V0 ABS FLAME RETARDANT	UL94 V0 ABS FLAME RETARDANT
GASKET	-	POLYURETHANE SEALING	POLYURETHANE SEALING	POLYURETHANE SEALING
WEIGHT	kg	2.60	3.16	3.74
MOUNTING	-	FAST CLIP ON	FAST CLIP ON	FAST CLIP ON
CONFORMITY	-	CE	CE	CE

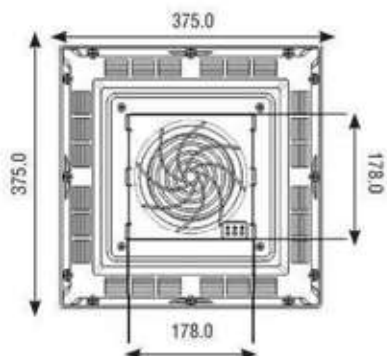



PF11000



PTF1000T







PTF1000

FILTER FANS

30m³/h

MODELS	UNIT	PF11000	PTF1000	PTF1000T
AIR FLOW RATE	m ³ /h	-	30 (41)	30 (41)
POWER SUPPLY	V/Hz	-	230V 50-60Hz	230V 50-60Hz
DIMENSIONS	mm	110x110x20.5	110x110x58.5	110x110x58.5
POWER CONSUMPTION	W	-	14 (13)	14 (13)
CURRENT CONSUMPTION	A	-	0.08/0.07	0.08/0.07
OVERCURRENT PROTECTION	-	-	IMPEDANCE	IMPEDANCE
ELECTRICAL CONNECTION	-	-	LEAD WIRE	3-POLE TERMINAL 2.5mm ²
OPERATING TEMPERATURE	°C	-10/+70	-10/+70	-10/+70
PROTECTION DEGREE	-	IP54	IP54 / CLASS I	IP54 / CLASS I
NOISE LEVEL	dB(A)	62 (64)	28 (31)	28 (31)
FLOW DIRECTION	-	-	OUTSIDE-IN	OUTSIDE-IN
BEARING	-	-	SLEEVE	SLEEVE
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT	UL94 V0 ABS FLAME RETARDANT	UL94 V0 ABS FLAME RETARDANT
GASKET	-	SELF-ADHESIVE	SELF-ADHESIVE	SELF-ADHESIVE
COLOR	-	RAL7035 (RAL7032 ON REQUEST)	RAL7035 (RAL7032 ON REQUEST)	RAL7035 (RAL7032 ON REQUEST)
WEIGHT	kg	0.10	0.40	0.40
MOUNTING	-	FAST CLIP ON	FAST CLIP ON	FAST CLIP ON
CONFORMITY	-	CE	CE	CE





PF1500



PTF1500T







PTF1500

FILTER FANS

100 m³/h

MODELS	UNIT	PF1500	PTF1500	PTF1500T
AIR FLOW RATE	m ³ /h	-	100(140)	100(140)
POWER SUPPLY	V/Hz	-	230V 50-60Hz	230V 50-60Hz
DIMENSIONS	mm	160x160x31	160x160x69	160x160x69
POWER CONSUMPTION	W	-	26 (23)	26 (23)
CURRENT CONSUMPTION	A	-	0.14/0.13	0.14/0.13
OVERCURRENT PROTECTION	-	-	IMPEDANCE	IMPEDANCE
ELECTRICAL CONNECTION	-	-	LEAD WIRE	3-POLE TERMINAL 2.5mm ²
OPERATING TEMPERATURE	°C	-10/+70	-10/+70	-10/+70
PROTECTION DEGREE	-	IP54	IP54 / CLASS I	IP54 / CLASS I
NOISE LEVEL	dB(A)	-	42 (46)	42 (46)
FLOW DIRECTION	-	-	OUTSIDE-IN	OUTSIDE-IN
BEARING	-	-	BALL	BALL
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT	UL94 V0 ABS FLAME RETARDANT	UL94 V0 ABS FLAME RETARDANT
GASKET	-	POLYURETHANE SEALING	POLYURETHANE SEALING	POLYURETHANE SEALING
COLOR	-	RAL7035 (RAL7032 ON REQUEST)	RAL7035 (RAL7032 ON REQUEST)	RAL7035 (RAL7032 ON REQUEST)
WEIGHT	kg	0.18	0.68	0.68
MOUNTING	-	FAST CLIP ON	FAST CLIP ON	FAST CLIP ON
CONFORMITY	-	CE	CE	CE





PFI2500



PTF2500






PTF2500

FILTER FANS

115m³/h

MODELS	UNIT	PFI2500	PTF2500
AIR FLOW RATE	m ³ /h	-	115 (130)
POWER SUPPLY	V/Hz	-	230V 50-60Hz
DIMENSIONS	mm	260x260x31	260x260x103
POWER CONSUMPTION	W	-	26 (23)
CURRENT CONSUMPTION	A	-	0.14/0.13
OVERCURRENT PROTECTION	-	-	IMPEDANCE
ELECTRICAL CONNECTION	-	-	3-POLE TERMINAL
OPERATING TEMPERATURE	°C	-10/+70	
PROTECTION DEGREE	-	IP54	IP54 / CLASS I
NOISE LEVEL	dB(A)	-	42 (46)
FLOW DIRECTION	-	-	OUTSIDE-IN
BEARING	-	-	BALL
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT	
GASKET	-	POLYURETHANE SEALING	
COLOUR	-	RAL7035 (RAL7032 ON REQUEST)	
WEIGHT	kg	0.48	1.18
MOUNTING	-	FAST CLIP-ON	
CONFORMITY	-	CE	





PFI2500



PTF3500




PTF3500

FILTER FANS

240m³/h

MODELS	UNIT	PFI2500	PTF3500
AIR FLOW RATE	m ³ /h	-	240 (270)
POWER SUPPLY	V/Hz	-	230V 50-60Hz
DIMENSIONS	mm	260x260x31	260x260x103
POWER CONSUMPTION	W	-	37 (35)
CURRENT CONSUMPTION	A	-	0.23/0.22
OVERCURRENT PROTECTION	-	-	IMPEDANCE
ELECTRICAL CONNECTION	-	-	3-POLE TERMINAL
OPERATING TEMPERATURE	°C	-10/+70	
PROTECTION DEGREE	-	IP54	IP54 / CLASS I
NOISE LEVEL	dB(A)	-	52 (53)
FLOW DIRECTION	-	-	OUTSIDE-IN
BEARING	-	-	BALL
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT	
GASKET	-	POLYURETHANE SEALING	
COLOUR	-	RAL7035 (RAL7032 ON REQUEST)	
WEIGHT	kg	0.48	1.60
MOUNTING	-	FAST CLIP-ON	
CONFORMITY	-	CE	





PFI2500



PTF4500






PTF4500

FILTER FANS

650m³/h

MODELS	UNIT	PFI2500	PTF4500
AIR FLOW RATE	m ³ /h	-	650 (900)
POWER SUPPLY	V/Hz	-	230V 50-60Hz
DIMENSIONS	mm	260x260x31	260x260x111
POWER CONSUMPTION	W	-	66 (75)
CURRENT CONSUMPTION	A	-	0.35/0.38
OVERCURRENT PROTECTION	-	-	THERMAL
ELECTRICAL CONNECTION	-	-	4-POLE TERMINAL
OPERATING TEMPERATURE	°C	-10/+70	
PROTECTION DEGREE	-	IP54	IP54 / CLASS I
NOISE LEVEL	dB(A)	-	60 (63)
FLOW DIRECTION	-	-	OUTSIDE-IN
BEARING	-	-	BALL
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT	
GASKET	-	POLYURETHANE SEALING	
COLOUR	-	RAL7035 (RAL7032 ON REQUEST)	
WEIGHT	kg	0.48	2.84
MOUNTING	-	FAST CLIP-ON	
CONFORMITY	-	CE	





PFI3000



PTF5000







PTF5000

FILTER FANS

850m³/h

MODELS	UNIT	PFI3000	PTF5000
AIR FLOW RATE	m ³ /h	-	850 (1200)
POWER SUPPLY	V/Hz	-	230V 50-60Hz
DIMENSIONS	mm	325x325x31	325x325x111
POWER CONSUMPTION	W	-	110 (140)
CURRENT CONSUMPTION	A	-	0.350/0.72
OVERCURRENT PROTECTION	-	-	THERMAL
ELECTRICAL CONNECTION	-	-	4-POLE TERMINAL
OPERATING TEMPERATURE	°C	-10/+70	
PROTECTION DEGREE	-	IP54	IP54 / CLASS I
NOISE LEVEL	dB(A)	-	65 (68)
FLOW DIRECTION	-	-	OUTSIDE-IN
BEARING	-	-	BALL
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT	
GASKET	-	POLYURETHANE SEALING	
COLOUR	-	RAL7035 (RAL7032 ON REQUEST)	
WEIGHT	kg	0.70	4.12
MOUNTING	-	FAST CLIP-ON	
CONFORMITY	-	CE	



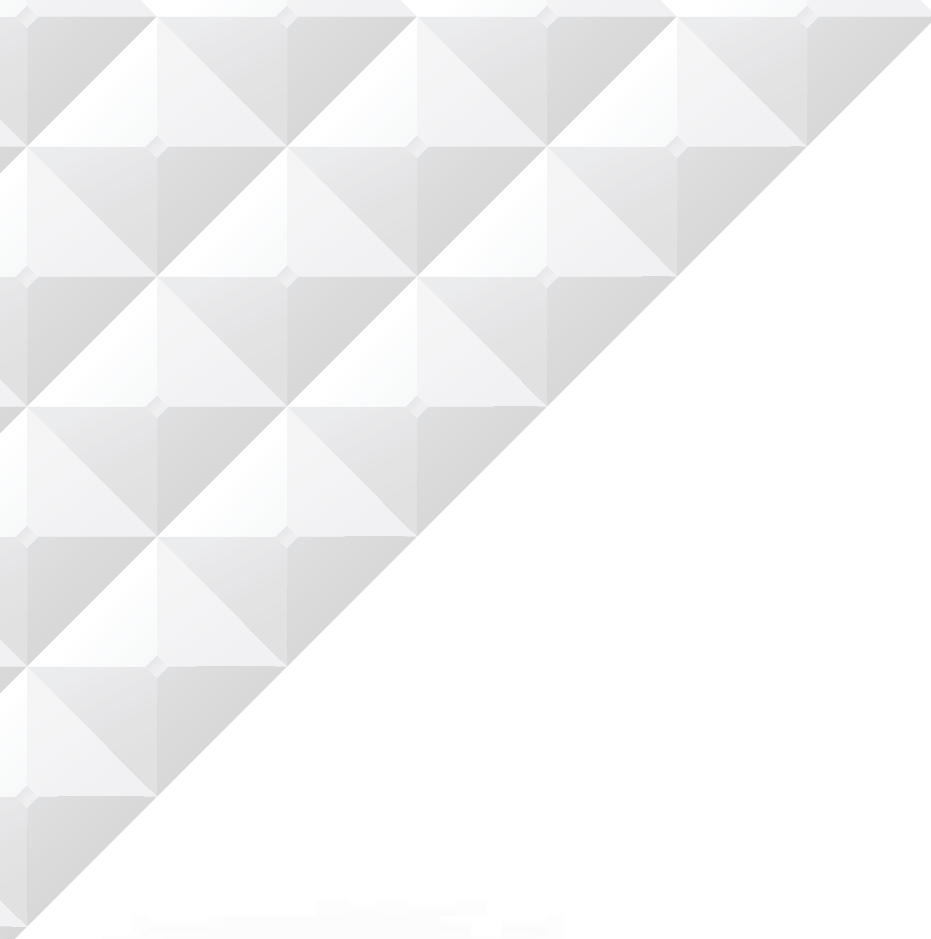




CONTROL





TEMPERATURE CONTROL THERMOSTATS




MODELS	UNIT	PTHT	PTVT
CONTACT FUNCTION	-	NC	NO
TEMPERATURE SETTING RANGE	°C	0-60	0-60
COLOUR OF POTENTIOMETER	-	RED	BLUE
250V AC / 120V AC	A	10 (2)	15 (2)
SENSOR TYPE	-	BIMETAL	
CONTACT TYPE	-	SNAP ACTION	
SERVICE LIFE	Cycle	> 100.000	
ELECTRICAL CONNECTIONS	-	2-POLE TERMINAL	
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT	
PROTECTION DEGREE	EN60529	IP20	
OPERATING TEMPERATURE	°C	-25 / +80	
STORAGE TEMPERATURE	°C	-45 / +80	
MOUNTING	-	CLIP FOR MOUNTING on DIN RAIL 35mm	
INSTALLATION POSITION	-	VARIABLE	
CONFORMITY	-	CE	
DIMENSIONS HxWxD	mm	61x34x38	
WEIGHT	g	45	

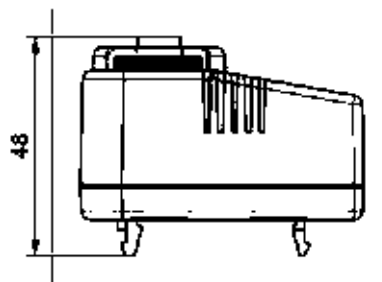



TEMPERATURE CONTROL DUAL THERMOSTAT




MODELS	UNIT	PTHVT
CONTACT FUNCTION	-	NC+NO
TEMPERATURE SETTING RANGE	°C	0-60 / 0-60
COLOUR OF POTENTIOMETER	-	RED + BLUE
250V AC / 120V AC	A	10 (2) / 15 (2)
SENSOR TYPE	-	BIMETAL
CONTACT TYPE	-	SNAP ACTION
SERVICE LIFE	Cycle	> 100.000
ELECTRICAL CONNECTIONS	-	4-POLE TERMINAL
PLASTIC MATERIAL	-	UL94 V0 ABS FLAME RETARDANT
PROTECTION DEGREE	EN60529	IP20
OPERATING TEMPERATURE	°C	-25 / +80
STORAGE TEMPERATURE	°C	-45 / +80
MOUNTING	-	CLIP FOR MOUNTING on DIN RAIL 35mm
INSTALLATION POSITION	-	VARIABLE
CONFORMITY	-	CE
DIMENSIONS HxWxD	mm	65x59x42
WEIGHT	g	80

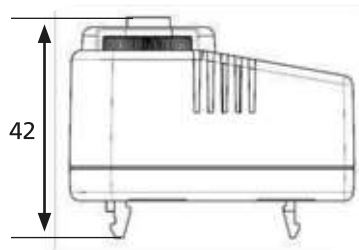



HUMIDITY CONTROL MECHANICAL HYGROSTAT

MODELS	UNIT	PHG02
POWER SUPPLY	V AC	110-250
SETTING RANGE	%RH	10-90
COLOUR OF POTENTIOMETER	-	BLACK
CURRENT	A	10-5
DIFFERENTIAL	-	%5, max. %10
SENSOR TYPE	-	POLYAMIDE RIBBON
ELECTRICAL CONNECTIONS	-	3-POLE TERMINAL
ELECTRICAL SECTION WIRES	-	FROM 0,75mm ² to 4.0mm ²
OPERATING TEMPERATURE	°C	+10 / +60
STORAGE TEMPERATURE	°C	+10 / +60
PROTECTION DEGREE	-	IP20
COLOUR	-	RAL7035
MOUNTING	-	CLIP FOR MOUNTING on DIN RAIL 35mm
DIMENSIONS HxWxD	mm	105x60x55
WEIGHT	g	180
CONFORMITY	-	CE

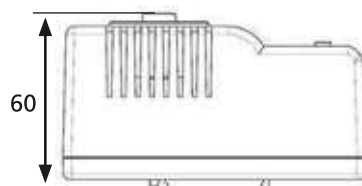

DIGITAL HYGROTHERM

Technical Specifications

- Dimensions : 35x77mm
- Display : 3 Digits 7 Segment
- Sensor Type : Digital Temperature/Humidity sensor
- Measuring Scale : -19.9 .. 80.0 °C, 5 .. 95%RH
- Resolution : ± 1 °C, ± 1 %RH
- Accuracy(typical) : ± 1 °C, ± 3 (%RH); over full scale
- Control Form : ON-OFF
- °C Out Output : Relay (NO + NC), 250VAC, 2A, Resistive load
- %RH Out Output : Relay (NO), 250VAC, 2A, Resistive load
- °C Function : Ht (heating), CL (cooling);selectable
- %RH Function : lo (decrease humidity), hi (increase humidity);selectable
- Supply Voltage : 100..240VAC, 50 / 60Hz
- Power Consumption : < 6VA
- Operating Temp. : 0 .. 50 °C
- Operating Altitude : H-C; Ht(Heating), CL (Cooling); selectable
- Power Consumption : <6 VA
- Failure : In case of measurement failure, "Err" message displayed and Relay outputs become OFF.

NOTE: The temperature and humidity sensor is included in the device



HT-310

DIGITAL THERMOSTAT

Technical Specifications

- Dimensions : 36x90x65mm, rail mount
- Display : 3 Digits 7 Segment
- Sensor Type : PTC
- Measuring Scale : -50...+150 °C
- Resolution : ± 1 °C
- Accuracy : ± 1 (Over full scale)
- Control Form : ON-OFF
- Out Output : Relay , 250 VAC, 2A, Resistive Load
- Alarm Output : Relay , 250 VAC, 2A, Resistive Load
- Heat Set : LoL...UPL °C (Hst)
- Alarm Set : AtP=Ab s,-Ab; LoL... °C (Ast)
AtP=rEL, -rL; (HSt+rAL) ,(HSt-20) ... (Hst+20) °C
- Heat Hysteresis : 1...20 °C (Hhs)
- Alarm Hysteresis : 1...20 °C (Hhs)
- Offset : -20...+20 °C (OFS)
- Function : H-C; Ht(Heating), CL (Cooling); selectable
- Supply Voltage : 100...240 VAC, 50/60 Hz
- Power Consumption : <6 VA
- Operating Temperature:-20 °C...55°C
- Operating Altitude : <2000m
Failure

NOTE: The PTC Sensor is included in the device.



PDT 50- 150



AIR CONDITIONING




STANDART

INOX

IP65

PANELTYPE AIR CONDITIONERS

MODELS	UNIT	PAC050.01	PAC075.01	PAC100.01	PAC150.01	PAC200.01	PAC250.01
COOLING CAPACITY	EN814 A35A35	500W	750W	1000W	1500W	2000W	2500W
COOLING CAPACITY	EN814 A35A50	400W	600W	800W	1200W	1600W	2000W
POWER SUPPLY	V / Hz	1 PHASE 230V 50/60 Hz					
DIMENSIONS HxWxD	mm	500x310x205	610x320x210	640x320x210	800x400x255	1000x255x400	1000x255x400
MAX. CURRENT	A	2.65/2.75	2.65/2.75	3.50/3.60	4.50/4.60	6.00	6.00
DELAYED FUSE	A	6	6	10	10	16	16
REFRIGERANT	-	R134a					
OPERATING TEMPERATURE	°C	+20 / +55					
TEMPERATURE CONTROLLER	-	DIGITAL THERMOSTAT FACTORY, SET 35°C					
COMPRESSOR TYPE	-	HERMETIC					
NOISE LEVEL	dB(A)	52	56	62	65	70	70
ELECTRICAL CONNECTIONS	-	3-POLE TERMINAL CONNECTOR					
PROTECTION DEGREE	-	ENCLOSURE INSIDE IP54, AMBIENT INSIDE IP34					
WEIGHT	kg	18.00	26.30	28.50	32.00	43.50	44.00
COLOUR	-	RAL7035 GREY (INOX & IP65 on request)					
CONFORMITY	-	CE					

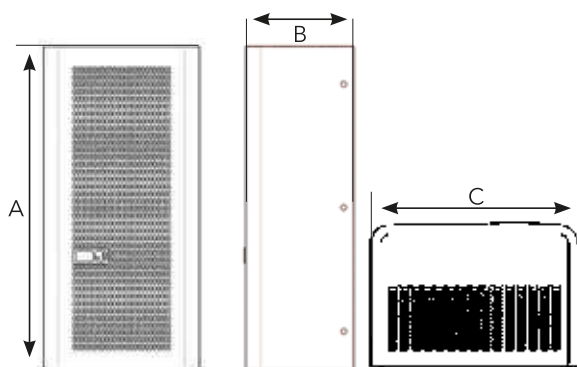

	A(mm)	B(mm)	C(mm)	WEIGHT(kg)
PAC050	500	205	310	18.00
PAC075	610	210	320	26.30
PAC100	640	210	320	28.50
PAC150	800	255	400	32.00
PAC200	1000	255	400	43.50
PAC250	1000	255	400	44.00-





HEATING



MINI PTC HEATERS

FEATURES	UNIT	MPHT 15	MPHT 25
HEATING CAPACITY	W	15	25
POWER SUPPLY	V	100-250V AC DC	
MAX. CURRENT	A	2A	
HEATING ELEMENT TYPE	-	PTC RESISTOR, SELF REGULATING	
OVERCURRENT PROTECTION	-	ELECTRONIC THERMAL OVERLOAD	
ELECTRICAL CONNECTIONS	-	LEAD WIRE 30cm L-N-E	
PROTECTION CLASS IEC	-	CLASS II	
PROTECTION DEGREE EN60529	-	IP20	
OPERATING TEMPERATURE	°C	-45 / +70	
STORAGE TEMPERATURE	°C	-45 / +70	
RADIATOR	-	ALLUMINIUM PROFILE, ANODIZED	
MOUNTING	-	CLIP FOR MOUNTING on DIN RAIL 35mm	
INSTALLATION POSITION	-	BEST EFFICIENCY IN VERTICAL POSITION	
DIMENSIONS HxWxD	mm	60x50x27	70x50x27
WEIGHT	kg	0.11	0.12
CONFORMITY	-	CE	



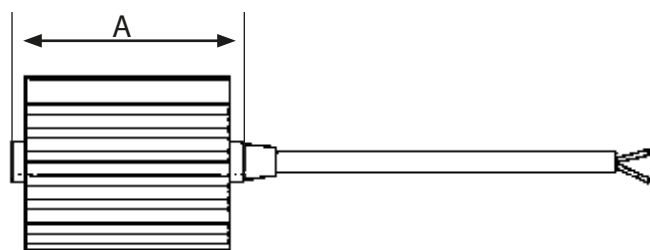


	A	B	C
MPHT15	60	50	27
MPHT25	70	50	27



PTC HEATERS

FEATURES	UNIT	PHT 030	PHT 050	PHT 075	PHT 100	PHT 150
HEATING CAPACITY	W	30	50	75	100	150
POWER SUPPLY	V	100-250V AC DC				
MAX. CURRENT	A	2A	2A	4A	4A	6A
HEATING ELEMENT TYPE	-	PTC RESISTOR, SELF REGULATING				
OVERCURRENT PROTECTION	-	ELECTRONIC THERMAL OVERLOAD				
ELECTRICAL CONNECTIONS	-	3 POLE TERMINAL N-L-E				
PROTECTION CLASS IEC	-	CLASS II				
PROTECTION DEGREE EN60529	-	IP20				
OPERATING TEMPERATURE	°C	-45 / +70				
STORAGE TEMPERATURE	°C	-45 / +70				
RADIATOR	-	ALLUMINIUM PROFILE, ANODIZED				
MOUNTING	-	CLIP FOR MOUNTING on DIN RAIL 35mm				
INSTALLATION POSITION	-	BEST EFFICIENCY IN VERTICAL POSITION				
DIMENSIONS HxWxD	mm	128x70x59	138x70x59	178x70x59	188x70x59	228x70x59
WEIGHT	kg	0.41	0.44	0.54	0.59	0.72
CONFORMITY	-	CE				






	A	B	C
PHT030	128	59	70
PHT050	138	59	70
PHT075	178	59	70
PHT100	188	59	70
PHT150	228	59	70



PTC HEATERS WITH FAN

FEATURES	UNIT	PFHT 100	PFHT 150
HEATING CAPACITY	W	100	150
POWER SUPPLY	V	100-250V AC DC	
MAX. CURRENT	A	4A	4A
HEATING ELEMENT TYPE	-	PTC RESISTOR, SELF REGULATING	
AXIAL FAN	-	60x60x30mm 16m ³ /h	
OVERCURRENT PROTECTION	-	ELECTRONIC THERMAL OVERLOAD	
ELECTRICAL CONNECTIONS	-	3-POLE TERMINAL N-L-E	
PROTECTION CLASS IEC	-	CLASS II	
PROTECTION DEGREE EN60529	-	IP20	
OPERATING TEMPERATURE	°C	-45 / +70	
STORAGE TEMPERATURE	°C	-45 / +70	
RADIATOR	-	ALLUMINIUM PROFILE, ANODIZED	
MOUNTING	-	CLIP FOR MOUNTING on DIN RAIL 35mm	
INSTALLATION POSITION	-	BEST EFFICIENCY IN VERTICAL POSITION	
DIMENSIONS HxWxD	mm	170x89x60	210x89x60
WEIGHT	kg	0.70	0.94
CONFORMITY	-	CE	






	A	B	C
FPHT100	170	89	60
FPHT150	210	89	60



RESISTANCE HEATERS WITH FAN

FEATURES	UNIT	PFHT 250	PFHT 500	PFHT 750
HEATING CAPACITY	W	250	500	750
POWER SUPPLY	V	230V 50/60Hz		
MAX. CURRENT	A	1.2A	2.4A	3.6A
HEATING ELEMENT TYPE	-	RESISTANCE HEATER		
AXIAL FAN	-	80x80x25mm 35m ³ /h		
OVERCURRENT PROTECTION	-	ELECTRONIC THERMAL OVERLOAD		
ELECTRICAL CONNECTIONS	-	3-POLE TERMINAL N-L-E		
PROTECTION CLASS IEC	-	CLASS I, EARTHED		
PROTECTION DEGREE EN60529	-	IP20		
OPERATING TEMPERATURE	°C	-25 / +70		
STORAGE TEMPERATURE	°C	-25 / +70		
RADIATOR	-	ALLUMINIUM PROFILE, ANODIZED		
MOUNTING	-	CLIP FOR MOUNTING on DIN RAIL 35mm		
INSTALLATION POSITION	-	BEST EFFICIENCY IN VERTICAL POSITION		
DIMENSIONS HxWxD	mm	152x80x110	182x80x110	232x80x110
WEIGHT	kg	0.98	1.20	1.45
CONFORMITY	-	CE		




	A	B	C
PFHT250	152	110	80
PFHT500	182	110	80
PFHT750	232	110	80



PANEL ACCESSORIES

CODE	DESCRIPTION	PACK IN PCS
PFM 1000	FILTER MAT FOR PFI 1000	10
PFM 1500	FILTER MAT FOR PFI 1500	10
PFM 2500	FILTER MAT FOR PFI 2500	10
PFM 3000	FILTER MAT FOR PFI 3000	10

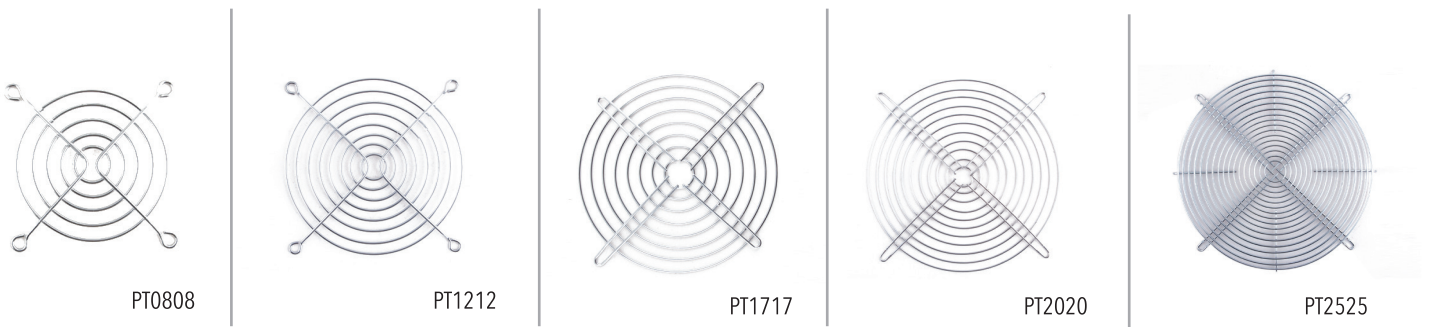

CODE	DESCRIPTION	PACK IN PCS
PT 0808	METALLIC PROTECTION GRILL FOR 80x80mm	100
PT 1212	METALLIC PROTECTION GRILL FOR 120x120mm	100
PT 1717	METALLIC PROTECTION GRILL FOR 170x170mm	100
PT 2020	METALLIC PROTECTION GRILL FOR 225x225mm	100
PT 2525	METALLIC PROTECTION GRILL FOR 280x280mm	100



CODE	DESCRIPTION	PACK IN PCS
PPCA5	DRAWING POCKET A5 SIZE	10
PPCA4	DRAWING POCKET A4 SIZE	10

DISTRIBUTION BLOCKS

CODE	NUMBER OF POLES AND CURRENT	DISTRIBUTION BLOCKS	DIMENSIONS	PCS
PDB 207	2 Pole 125 Amper	5*5,3+2*7,5 (2x7 Pole)	65x45,5x51 mm	50
PDB 211	2 Pole 125 Amper	9*5,3+2*7,5 (2x11 Pole)	100x45,5x51 mm	50
PDB 215	2 Pole 125 Amper	11*5,3+2*7,5+2*9.0 mm (2x15 Pole)	132x45,5x51 mm	50
PDB 407	4 Pole 125 Amper	5*5,3+2*7,5 (4x7 Pole)	65x89,5x50 mm	50
PDB 411	4 Pole 125 Amper	7*5,3+2*7,5+2*9.0 mm (4x11 Pole)	100x89,5x50 mm	50
PDB 415	4 Pole 125 Amper	9*5,3+2*7,5+2*9.0 mm (4x15 Pole)	132x89,5x51 mm	50



PDB207



PDB211



PDB215



PDB407



PDB411




PDB415

COPPER TUBULAR CABLE LUGS



CODE	CROSS SECTION	BOLT Ø	D4	WALL THICKNESS	A	D1	B	C1	C2	L	PACKAGE QTY
SKP10-5	10 mm	M5	6,2	0,75	13,3	4,7	10,5	7,2	8,8	29,8	800
SKP16-6	16 mm	M6	7,9	0,75	18,5	6,4	11,8	7,1	7,5	33,5	500
SKP25-8	25 mm	M8	9,0	0,85	22,1	7,3	13,2	7,8	9,0	38,6	300
SKP35-8	35 mm	M8	10,8	1,15	25,5	8,5	15,5	9,3	9,6	44,5	200
SKP35-10	35 mm	M10	10,8	1,15	25,5	8,5	15,5	9,3	9,6	44,5	200
SKP50-10	50 mm	M10	12,6	1,30	28,6	10,0	18,2	10,8	12,1	51,5	150
SKP70-10	70 mm	M10	14,5	1,50	34,5	11,5	21,0	10,8	10,0	55,0	100
SKP95-10	95 mm	M10	16,5	1,50	37,0	13,5	24,2	10,85	12,0	60,0	80
SKP95-12	95 mm	M12	16,5	1,50	37,0	13,5	24,2	10,85	12,0	60,0	80
SKP120-12	120 mm	M12	19,1	1,80	43,0	15,5	28,0	13,9	13,2	70,0	50
SKP150-12	150 mm	M12	20,6	1,80	43,2	17,0	30,2	16,3	16,0	75,5	30
SKP185-16	185 mm	M16	22,6	1,90	47,3	18,8	33,5	17,0	18,6	83,0	30
SKP240-16	240 mm	M16	25,2	2,00	54,7	21,2	37,5	17,35	18,2	90,0	25

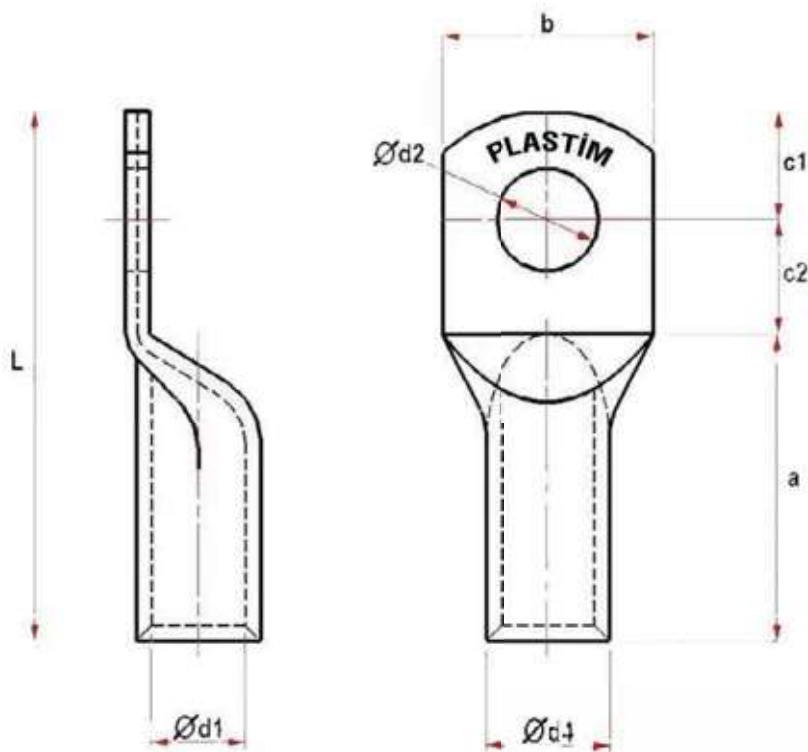

DIN RAILS AND SUPPORT



PRODUCT CODE	DESCRIPTION	TYPE	LENGTH	PACKING QTY
PDR1001	35x7.5mm	Un Perforated	1mt	20
PDR1002	35x7.5mm	Un Perforated	2mt	20
PDR2001	35x7.5mm	Perforated	1mt	20
PDR2002	35x7.5mm	Perforated	2mt	20

PRODUCT CODE	DESCRIPTION	TYPE	LENGTH	PACKING QTY
PDR3001	35x15mm	Un Perforated	1mt	10
PDR3002	35x15mm	Un Perforated	2mt	10
PDR4001	35x15mm	Perforated	1mt	10
PDR4002	35x15mm	Perforated	2mt	10



PRODUCT CODE	DESCRIPTION	PACKING / QTY
PRT	DIN Rail Support	25 Pcs













CABLE TERMINALS

Insulated Cord End Terminals German Norm

Product Code	Color	Cross Section	Dimensions					Package Qty
			[F]	[L]	[W]	[B]	[D]	
PKY-2005		0,50	8	14	2,6	6,0	1,3	1000
PKY-2007		0,75	8	14	2,8	6,3	1,5	1000
PKY-2010		1,00	8	14	3,0	6,3	1,7	1000
PKY-2015		1,50	8	14	3,5	6,3	2,0	1000
PKY-2025		2,50	8	14	4,2	7,4	2,5	500
PKY-2040		4,00	10	17	4,8	7,4	3,2	500
PKY-2060		6,00	12	20	6,3	8,5	3,9	250
PKY-2100		10,00	12	22	7,6	8,8	4,9	100
PKY-2160		16,00	12	24	8,8	10,0	6,2	100
PKY-2250		25,00	16	28	11,2	12,0	7,7	50
PKY-2350		35,00	16	30	12,7	14,0	8,7	50
PKY-2500		50,00	20	36	15,0	16,0	10,9	25












Insulated Cord End Terminals French Norm

Product Code	Color	Cross Section	Dimensions					Package Qty
			[F]	[L]	[W]	[B]	[D]	
PKY-3005		0,50	8	14	2,6	6,0	1,3	1000
PKY-3007		0,75	8	14	2,8	6,3	1,5	1000
PKY-3010		1,00	8	14	3,0	6,3	1,7	1000
PKY-3015		1,50	8	14	3,5	6,3	2,0	1000
PKY-3025		2,50	8	14	4,2	7,4	2,5	500
PKY-3040		4,00	10	17	4,8	7,4	3,2	500
PKY-3060		6,00	12	20	6,3	8,5	3,9	250
PKY-3100		10,00	12	22	7,6	8,8	4,9	100
PKY-3160		16,00	12	24	8,8	10,0	6,2	100
PKY-3250		25,00	16	28	11,2	12,0	7,7	50
PKY-3350		35,00	16	30	12,7	14,0	8,7	50
PKY-3500		50,00	20	36	15,0	16,0	10,9	25












CABLE TERMINALS

Insulated Twin Cord End Terminals German Norm

Product Code	Color	Cross Section	Dimensions					Package Qty
			[F]	[L]	[W]	[B]	[D]	
PKY-22005		2x0,50	8	14	5,0	6,5	1,8	1000
PKY-22007		2x0,75	8	14	5,5	6,7	2,1	500
PKY-22010		2x1,00	8	14	5,5	7,1	2,4	500
PKY-22015		2x1,50	8	14	6,4	7,5	2,6	500
PKY-22025		2x2,50	10	14	8,0	8,5	3,3	250
PKY-22040		2x4,00	12	17	8,0	11,1	4,2	200
PKY-22060		2x6,00	14	20	9,5	12,1	5,3	100
PKY-22100		2x10,00	14	27	12,6	12,6	6,9	50
PKY-22160		2x16,00	14	31	19,0	19,0	8,7	25



Insulated Twin Cord End Terminals French Norm

Product Code	Color	Cross Section	Dimensions					Package Qty
			[F]	[L]	[W]	[B]	[D]	
PKY-23005		2x0,50	8	14	5,0	6,5	1,8	1000
PKY-23007		2x0,75	8	14	5,5	6,7	2,1	500
PKY-23010		2x1,00	8	14	5,5	7,1	2,4	500
PKY-23015		2x1,50	8	14	6,4	7,5	2,6	500
PKY-23025		2x2,50	10	14	8,0	8,5	3,3	250
PKY-23040		2x4,00	12	17	8,0	11,1	4,2	200
PKY-23060		2x6,00	14	20	9,5	12,1	5,3	100
PKY-23100		2x10,00	14	27	12,6	12,6	6,9	50
PKY-23160		2x16,00	14	31	19,0	19,0	8,7	25




CABLE TERMINALS

Ring Type Insulated Cable Terminals

Product Code	Cross Section	Bolt Size	Dimensions (mm)				Package Qty
			[D2]	[I]	[D4]	[A]	
PYK-301	0,50-1,50mm	M3	3,2	16,0	4,0	10,0	200
PYK-401	0,50-1,50mm	M4	4,3	17,0	4,0	10,0	200
PYK-501	0,50-1,50mm	M5	5,3	18,0	4,0	10,0	200
PYK-601	0,50-1,50mm	M6	6,5	18,0	4,0	10,0	200
PYK-801	0,50-1,50mm	M8	8,4	22,0	4,0	10,0	200



Product Code	Cross Section	Bolt Size	Dimensions (mm)				Package Qty
			[D2]	[I]	[D4]	[A]	
PYK-302	1,50-2,50mm	M3	3,2	16,0	4,5	10,0	200
PYK-402	1,50-2,50mm	M4	4,3	17,0	4,5	10,0	200
PYK-502	1,50-2,50mm	M5	5,3	19,0	4,5	10,0	200
PYK-602	1,50-2,50mm	M6	6,5	21,0	4,5	10,0	200
PYK-802	1,50-2,50mm	M8	8,4	22,0	4,5	10,0	200
PYK-1002	1,50-2,50mm	M10	10,5	22,0	4,5	10,0	200




Product Code	Cross Section	Bolt Size	Dimensions (mm)				Package Qty
			[D2]	[I]	[D4]	[A]	
PYK-406	4,00-6,00mm	M4	4,3	21,0	6,3	13,0	100
PYK-506	4,00-6,00mm	M5	5,3	22,0	6,3	13,0	100
PYK-606	4,00-6,00mm	M6	6,5	22,5	6,3	13,0	100
PYK-806	4,00-6,00mm	M8	8,4	26,0	6,3	13,0	100
PYK-1006	4,00-6,00mm	M10	10,5	28,0	6,3	13,0	100
PYK-1206	4,00-6,00mm	M12	13,0	28,0	6,3	13,0	100

Fork Type - Insulated Cable Terminals

Product Code	Cross Section	Bolt Size	Dimensions (mm)				Package Qty
			[D2]	[I]	[D4]	[A]	
PCK-301	0,50-1,50mm	M3	3,2	16,0	4,0	10,0	200
PCK-401	0,50-1,50mm	M4	4,3	17,0	4,0	10,0	200
PCK-501	0,50-1,50mm	M5	5,3	18,0	4,0	10,0	200
PCK-601	0,50-1,50mm	M6	6,5	20,0	4,0	10,0	200



Product Code	Cross Section	Bolt Size	Dimensions (mm)				Package Qty
			[D2]	[I]	[D4]	[A]	
PCK-302	1,50-2,50mm	M3	3,2	18,0	4,5	10,0	200
PCK-402	1,50-2,50mm	M4	4,3	17,0	4,5	10,0	200
PCK-502	1,50-2,50mm	M5	5,3	19,0	4,5	10,0	200
PCK-602	1,50-2,50mm	M6	6,5	21,0	4,5	10,0	200




Product Code	Cross Section	Bolt Size	Dimensions (mm)				Package Qty
			[D2]	[I]	[D4]	[A]	
PCK-406	4,00-6,00mm	M4	8,4	22,0	4,5	10,0	100
PCK-506	4,00-6,00mm	M5	10,5	22,0	4,5	10,0	100
PCK-606	4,00-6,00mm	M6	13,0	25,0	4,5	10,0	100
PCK-806	4,00-6,00mm	M8	4,0	21,0	6,3	13,0	100




Insulated Female Terminals

Product Code	Cross Section	Dimensions (mm)					Package Qty
		[W]	[F]	[L]	[E]	[D]	
PFT-1040	0,50-1,50mm	3,9	7,0	23,3	10,5	3,8	200
PFT-2050	1,50-2,50mm	4,9	7,0	23,3	10,5	4,7	100
PFT-5050	4,00-6,00mm	4,9	7,0	25,1	12,5	6,2	100

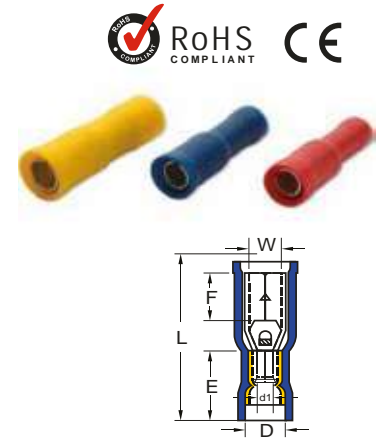

Insulated Male Terminals

Product Code	Cross Section	Dimensions (mm)					Package Qty
		[W]	[F]	[L]	[E]	[D]	
PMT-1040	0,50-1,50mm	4,0	8,5	21,5	10,5	3,8	200
PMT-2050	1,50-2,50mm	5,0	8,5	21,2	10,5	4,7	100
PMT-5050	4,00-6,00mm	5,0	8,5	24,0	13,0	6,2	100

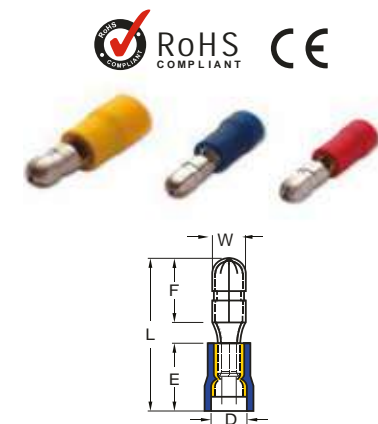

Insulated Pin Type Terminals

Product Code	Cross Section	Dimensions (mm)					Package Qty
		[W]	[F]	[L]	[E]	[D]	
PKI-101	0,50-1,50mm	1,9	10,0	19,0	10,0	4,0	200
PKI-102	1,50-2,50mm	1,9	12,0	21,8	10,0	4,5	200
PKI-106	4,00-6,00mm	2,8	14,0	27,0	27,0	6,4	100





PBO PUSH BUTTON SERIES

PBO PUSH BUTTON SERIES







Q22mm







	PRODUCT CODE	HEAD COLOR	DESCRIPTION	CONTACT	PACKAGE QTY
	PB0-AA31	Green	Push Button Green	1NO	10
	PB0-AA42	Red	Push Button Red	1NC	10
	PB0-AA51	Yellow	Push Button Yellow	1NO	10
	PB0-AA61	Blue	Push Button Blue	1NO	10
	PB0-AA11	White	Push Button White	1NO	10
	PB0-AA21	Black	Push Button Black	1NO	10
	PB0-AW31B5	White	LED Illuminated Push Button 24V White	1NO	10
	PB0-AW33B5	Green	LED Illuminated Push Button 24V Green	1NO	10
	PB0-AW34B5	Red	LED Illuminated Push Button 24V Red	1NC	10
	PB0-AW35B5	Yellow	LED Illuminated Push Button 24V Yellow	1NO	10
	PB0-AW36B5	Blue	LED Illuminated Push Button 24V Blue	1NO	10
	PB0-AW31M5	White	LED Illuminated Push Button 220V White	1NO	10
	PB0-AW33M5	Green	LED Illuminated Push Button 220V Green	1NO	10
	PB0-AW34M5	Red	LED Illuminated Push Button 220V Red	1NC	10
	PB0-AW35M5	Yellow	LED Illuminated Push Button 220V Yellow	1NO	10
	PB0-AW36M5	Blue	LED Illuminated Push Button 220V Blue	1NO	10
	PB0-AC42	Red	Mushroom Red Button	1NC	10
	PB0-AC31	Green	Mushroom Green Button	1NO	10
	PB0-AS542	Red	Emergency Stop Red	1NC	10
	PB0-AS542-24L	Red	LED Emergency Stop 24V Red	1NC	10
	PB0-AS542-230L	Red	LED Emergency Stop 220V Red	1NC	10



PB0 PUSH BUTTON SERIES

Q22mm

	PRODUCT CODE	HEAD COLOR	DESCRIPTION	CONTACT	PACKAGE QTY
     	PB0-AD21	Black	0-1 Selector	1NO	10
	PB0-AD33	Black	1-0-2 Selector	2NO	10
	PB0-AD53	Black	1-0-2 Selector Spring Turn	2NO	10
	PB0-AD41	Black	0-1 Selector Spring Turn	1NO	10
	PB0-AJ21	Black	0-1 Selector Long Handle	1NO	10
	PB0-AJ33	Black	1-0-2 Selector Long Handle	2NO	10
	PB0-AJ53	Black	1-0-2 Selector Spring Turn Long Handle	2NO	10

  	PB0-AK123B5	Green	LED Illuminated Selector 0-1 Button 24V Green	1NO	10
	PB0-AK124B5	Red	LED Illuminated Selector 0-1 Button 24V Red	1NC	10
	PB0-AK125B5	Yellow	LED Illuminated Selector 0-1 Button 24V Yellow	1NO	10
  	PB0-AK123M5	Green	LED Illuminated Selector 0-1 Button 220V Green	1NO	10
	PB0-AK124M5	Red	LED Illuminated Selector 0-1 Button 220V Red	1NC	10
	PB0-AK125M5	Yellow	LED Illuminated Selector 0-1 Button 220V Yellow	1NO	10

  	PB0-AK133B5	Green	LED Illuminated Selector 1-0-2 Button 24V Green	2NO	10
	PB0-AK134B5	Red	LED Illuminated Selector 1-0-2 Button 24V Red	2NC	10
	PB0-AK135B5	Yellow	LED Illuminated Selector 1-0-2 Button 24V Yellow	2NO	10
  	PB0-AK133M5	Green	LED Illuminated Selector 1-0-2 Button 220V Green	2NO	10
	PB0-AK134M5	Red	LED Illuminated Selector 1-0-2 Button 220V Red	2NC	10
	PB0-AK135M5	Yellow	LED Illuminated Selector 1-0-2 Button 220V Yellow	2NO	10

 	PB0-AG21	Black	Selector Button With Keylock 0-1	1NO	10
	PB0-AG33	Black	Selector Button With Keylock 1-0-2	2NO	10

PBO PUSH BUTTON SERIES

Q22mm



PRODUCT CODE	HEAD COLOR	DESCRIPTION	CONTACT	PACKAGE QTY
PB0-AL73415	Red+Green	Twin Button	1NO+1NC	10
PB0-AW734B5	Red+Green	LED Twin Button 24V	1NO+1NC	10
PB0-AW734M5	Red+Green	LED Twin Button 220V	1NO+1NC	10










PB0-LS22-24R	Red	LED Pilot Light Q22mm 24V Red	- -	10
PB0-LS22-24G	Green	LED Pilot Light Q22mm 24V Green	- -	10
PB0-LS22-24Y	Yellow	LED Pilot Light Q22mm 24V Yellow	- -	10
PB0-LS22-24W	White	LED Pilot Light Q22mm 24V White	- -	10
PB0-LS22-24B	Blue	LED Pilot Light Q22mm 24V Blue	- -	10
PB0-LS22-220R	Red	LED Pilot Light Q22mm 220V Red	- -	10
PB0-LS22-220G	Green	LED Pilot Light Q22mm 220V Green	- -	10
PB0-LS22-220Y	Yellow	LED Pilot Light Q22mm 220V Yellow	- -	10
PB0-LS22-220W	White	LED Pilot Light Q22mm 220V White	- -	10
PB0-LS22-220B	Blue	LED Pilot Light Q22mm 220V Blue	- -	10



PB0-B22-24	Black	Buzzer 24VAC-DC Black	- -	10
PB0-B22-220	Black	Buzzer 220VAC-DC Black	- -	10
PB0-LB22-24R	Red	Flash Buzzer Q22mm 24V AC-DC Red	- -	10
PB0-LB22-220R	Red	Flash Buzzer Q22mm 220V AC-DC Red	- -	10

PBO PUSH BUTTON ACCESSORIES

	PRODUCT CODE	COLOR	DESCRIPTION	CONTACT	PACKAGE QTY
	PB-BK 01Y	Yellow+Black	1 Hole Push button box	- -	1
	PB-BK 01G	Grey+Black	1 Hole Push button box	- -	1
	PB-BK 02G	Grey+Black	2 Hole Push button box	- -	1
	PB-BK 03G	Grey+Black	3 Hole Push button box	- -	1
	PB-BK 04G	Grey+Black	4 Hole Push button box	- -	1
	PB-BK 05G	Grey+Black	5 Hole Push button box	- -	1
	PB0-KB01	NC Contact	NC Contact	1NC	10
	PB0-KB10	NO Contact	NO Contact	1NO	10
	PB-ES60		Emergency Stop Label Q60mm	- -	10
	PB-ES90		Emergency Stop Label Q90mm	- -	10
	PB-BR2515		Label for Q22 Button	- -	50
	PB-KT22		Panel Plug Q22	- -	50
	PB-BKO		Protection Cover Oval	- -	10
	PB-BKY		Protection Cover Round	- -	10




INDUSTRIAL FANS

INDUSTRIAL FANS



80x80x25 mm
220VAC 50/60 Hz
Sleeve Bearing

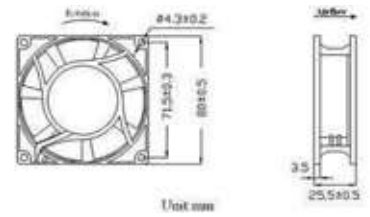


CODE	SUPPLY V	FREQUENCY Hz	BEARING -	CURRENT A	POWER W	SPEED Rpm	AIR FLOW m³/h	NOISE dB(A)	WEIGHT g
PF8025B	220VAC	50/60	Sleeve	0.08/0.07	13/12	2450	27/31	28/29	230

PF8025B - AXIAL FAN



80x80x38 mm
220VAC 50/60 Hz
Sleeve Bearing

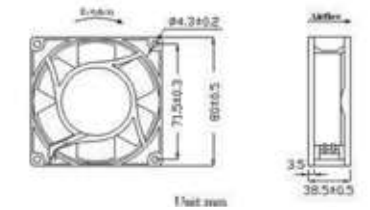


CODE	SUPPLY V	FREQUENCY Hz	BEARING -	CURRENT A	POWER W	SPEED Rpm	AIR FLOW m³/h	NOISE dB(A)	WEIGHT g
PF8038B	220VAC	50/60	Sleeve	0.08/0.07	14/13	2400	44/51	28/31	340

PF8038B - AXIAL FAN



120x120x25 mm
220VAC 50/60 Hz
Sleeve Bearing

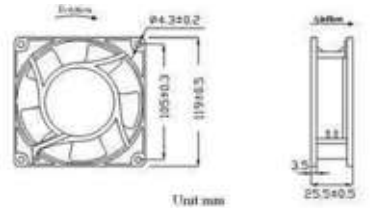


CODE	SUPPLY V	FREQUENCY Hz	BEARING -	CURRENT A	POWER W	SPEED Rpm	AIR FLOW m³/h	NOISE dB(A)	WEIGHT g
PF12025B	220VAC	50/60	Sleeve	0.08/0.07	16/15	2400	72/77	40/41	380

PF12025B - AXIAL FAN



120x120x38 mm
220VAC 50/60 Hz
Sleeve Bearing

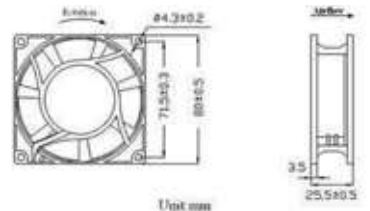


CODE	SUPPLY V	FREQUENCY Hz	BEARING -	CURRENT A	POWER W	SPEED Rpm	AIR FLOW m³/h	NOISE dB(A)	WEIGHT g
PF12038B	220VAC	50/60	Sleeve	0.14/0.13	26/23	2700	153/170	42/46	500

PF12038B - AXIAL FAN

INDUSTRIAL FANS



120x120x38 mm
220VAC 50/60 Hz
Ball Bearing

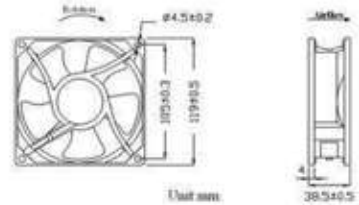


CODE	SUPPLY V	FREQUENCY Hz	BEARING -	CURRENT A	POWER W	SPEED Rpm	AIR FLOW m³/h	NOISE dB(A)	WEIGHT g
PF12038R	220VAC	50/60	Ball	0.14/0.13	26/23	2700	153/170	42/46	50

PF12038R - AXIAL FAN



172x150x51 mm
220VAC 50/60 Hz
Ball Bearing

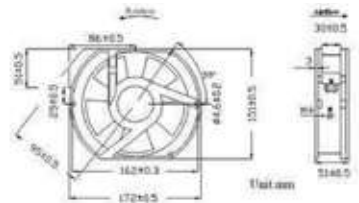


CODE	SUPPLY V	FREQUENCY Hz	BEARING -	CURRENT A	POWER W	SPEED Rpm	AIR FLOW m³/h	NOISE dB(A)	WEIGHT g
PF17250R	220VAC	50/60	Ball	0.23/0.22	37/35	2500	255/289	52/53	950

PF17250R - AXIAL FAN



172x163x51 mm
220VAC 50/60 Hz
Ball Bearing

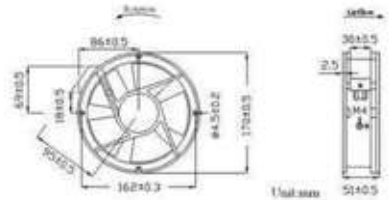


CODE	SUPPLY V	FREQUENCY Hz	BEARING -	CURRENT A	POWER W	SPEED Rpm	AIR FLOW m³/h	NOISE dB(A)	WEIGHT g
PF17260R	220VAC	50/60	Ball	0.23/0.22	37/35	2400	255/289	52/53	950

PF17260R - AXIAL FAN



Ø220x60 mm
220VAC 50/60 Hz
Ball Bearing



CODE	SUPPLY V	FREQUENCY Hz	BEARING -	CURRENT A	POWER W	SPEED Rpm	AIR FLOW m³/h	NOISE dB(A)	WEIGHT g
PF22060R	220VAC	50/60	Ball	0.31/0.30	56/54	2100	290/305	64/66	1700


PF22060R - AXIAL FAN



MANHOLES



THERMOPLASTIC MANHOLES

20x20x20cm THERMOPLASTIC MANHOLE

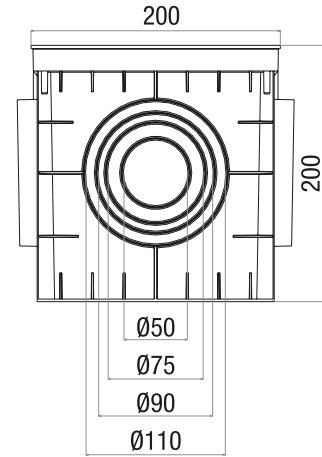

CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR2020	20x20x20	THERMOPLASTIC MANHOLE WITH GREY CLOSED COVER
PR2021	20x20x20	THERMOPLASTIC MANHOLE WITHOUT COVER
PR2023	20x20	GREY CLOSED COVER ■
PR2024	20x20	GREY GRIDDED COVER ■
PR2025	20x20	GREEN CLOSED COVER ■
PR2026	20x20	GREEN GRIDDED COVER ■



30x30x30cm THERMOPLASTIC MANHOLE

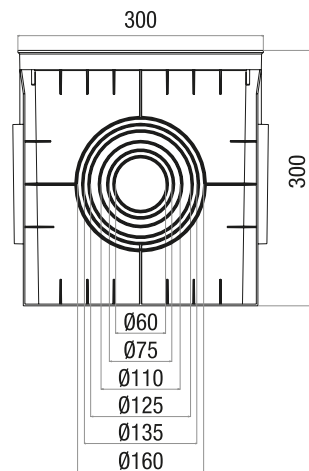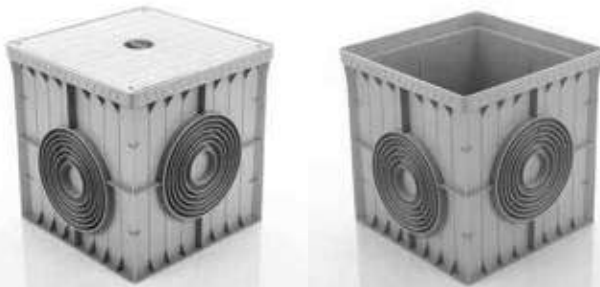

CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR3030	30x30x30	THERMOPLASTIC MANHOLE WITH GREY CLOSED COVER
PR3031	30x30x30	THERMOPLASTIC MANHOLE WITHOUT COVER
PR3033	30x30	GREY CLOSED COVER ■
PR3034	30x30	GREY GRIDDED COVER ■
PR3035	30x30	GREEN CLOSED COVER ■
PR3036	30x30	GREEN GRIDDED COVER ■


THERMOPLASTIC MANHOLES

35x35x35cm THERMOPLASTIC MANHOLE

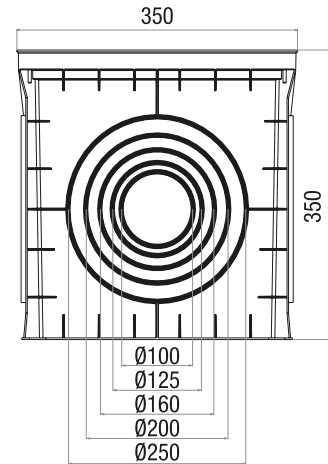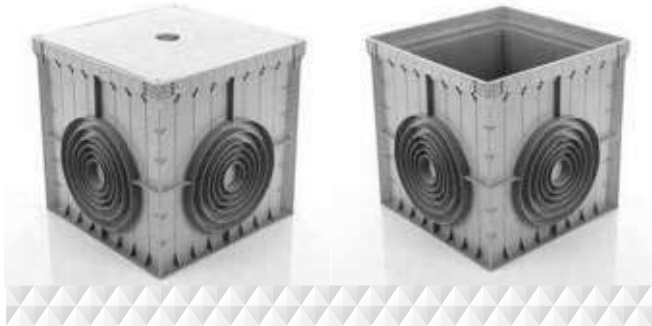

CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR3530	35x35x35	THERMOPLASTIC MANHOLE WITH GREY CLOSED COVER
PR3531	35x35x35	THERMOPLASTIC MANHOLE WITHOUT COVER
PR3534	35x35	GREY CLOSED COVER
PR3535	35x35	GREY GRIDDED COVER
PR3536	35x35	GREEN CLOSED COVER
PR3537	35x35	GREEN GRIDDED COVER


40x40x40cm THERMOPLASTIC MANHOLE

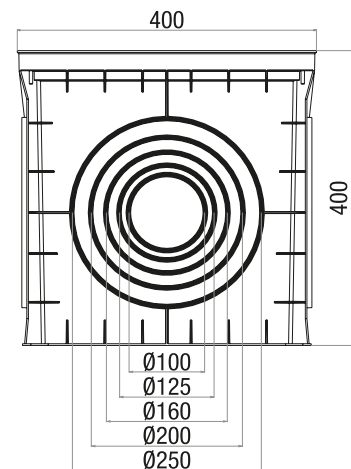


CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR4040	40x40x40	THERMOPLASTIC MANHOLE WITH GREY CLOSED COVER
PR4041	40x40x40	THERMOPLASTIC MANHOLE WITHOUT COVER
PR4044	40x40	GREY CLOSED COVER
PR4045	40x40	GREY GRIDDED COVER
PR4046	40x40	GREEN CLOSED COVER
PR4047	40x40	GREEN GRIDDED COVER

THERMOPLASTIC MANHOLES

50x50x50cm THERMOPLASTIC MANHOLE

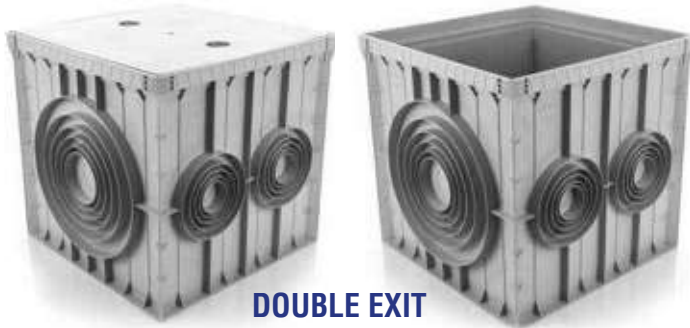


DOUBLE EXIT

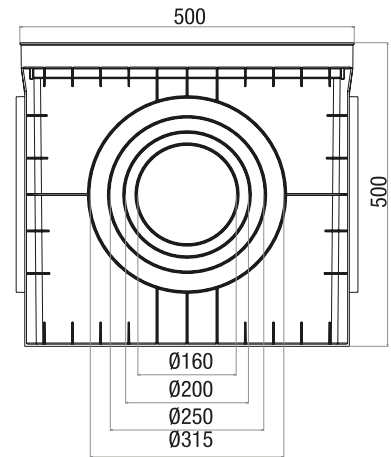

CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR5050	50x50x50	THERMOPLASTIC MANHOLE WITH GREY CLOSED COVER
PR5051	50x50x50	THERMOPLASTIC MANHOLE WITHOUT COVER
PR5054	50x50	GREY CLOSED COVER <input type="checkbox"/>
PR5055	50x50	GREY GRIDDED COVER <input type="checkbox"/>
PR5056	50x50	GREEN CLOSED COVER <input checked="" type="checkbox"/>
PR5057	50x50	GREEN GRIDDED COVER <input checked="" type="checkbox"/>

55x55x55cm THERMOPLASTIC MANHOLE

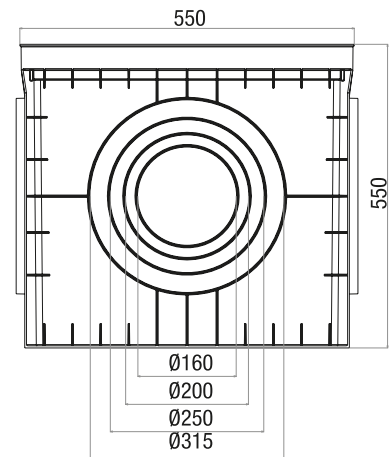

CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR5550	55x55x55	THERMOPLASTIC MANHOLE WITH GREY CLOSED COVER
PR5551	55x55x55	THERMOPLASTIC MANHOLE WITHOUT COVER
PR5554	55x55	GREY CLOSED COVER <input type="checkbox"/>
PR5555	55x55	GREY GRIDDED COVER <input type="checkbox"/>
PR5556	55x55	GREEN CLOSED COVER <input checked="" type="checkbox"/>
PR5557	55x55	GREEN GRIDDED COVER <input checked="" type="checkbox"/>

THERMOPLASTIC MANHOLE COVERS WITH FRAME



CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR2028GD	20x20	GREY CLOSED COVER WITH FRAME
PR3038GD	30x30	
PR3538GD	35x35	
PR4048GD	40x40	
PR5058GD	50x50	
PR5558GD	55x55	



CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR2028GI	20x20	GREY GRIDDED COVER WITH FRAME
PR3038GI	30x30	
PR3538GI	35x35	
PR4048GI	40x40	
PR5058GI	50x50	
PR5558GI	55x55	

THERMOPLASTIC MANHOLE COVERS WITH FRAME



CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR2028YD	20x20	GREEN CLOSED COVER WITH FRAME
PR3038YD	30x30	
PR3538YD	35x35	
PR4048YD	40x40	
PR5058YD	50x50	
PR5558YD	55x55	




CODE	DIMENSIONS (cm) (WxHxD)	DESCRIPTION
PR2028YI	20x20	GREEN GRIDDED COVER WITH FRAME
PR3038YI	30x30	
PR3538YI	35x35	
PR4048YI	40x40	
PR5058YI	50x50	
PR5558YI	55x55	

NOTES

A series of horizontal dashed lines for writing notes.



It has always been **Plastim's** main principal to use the ***highest technology*** for its production

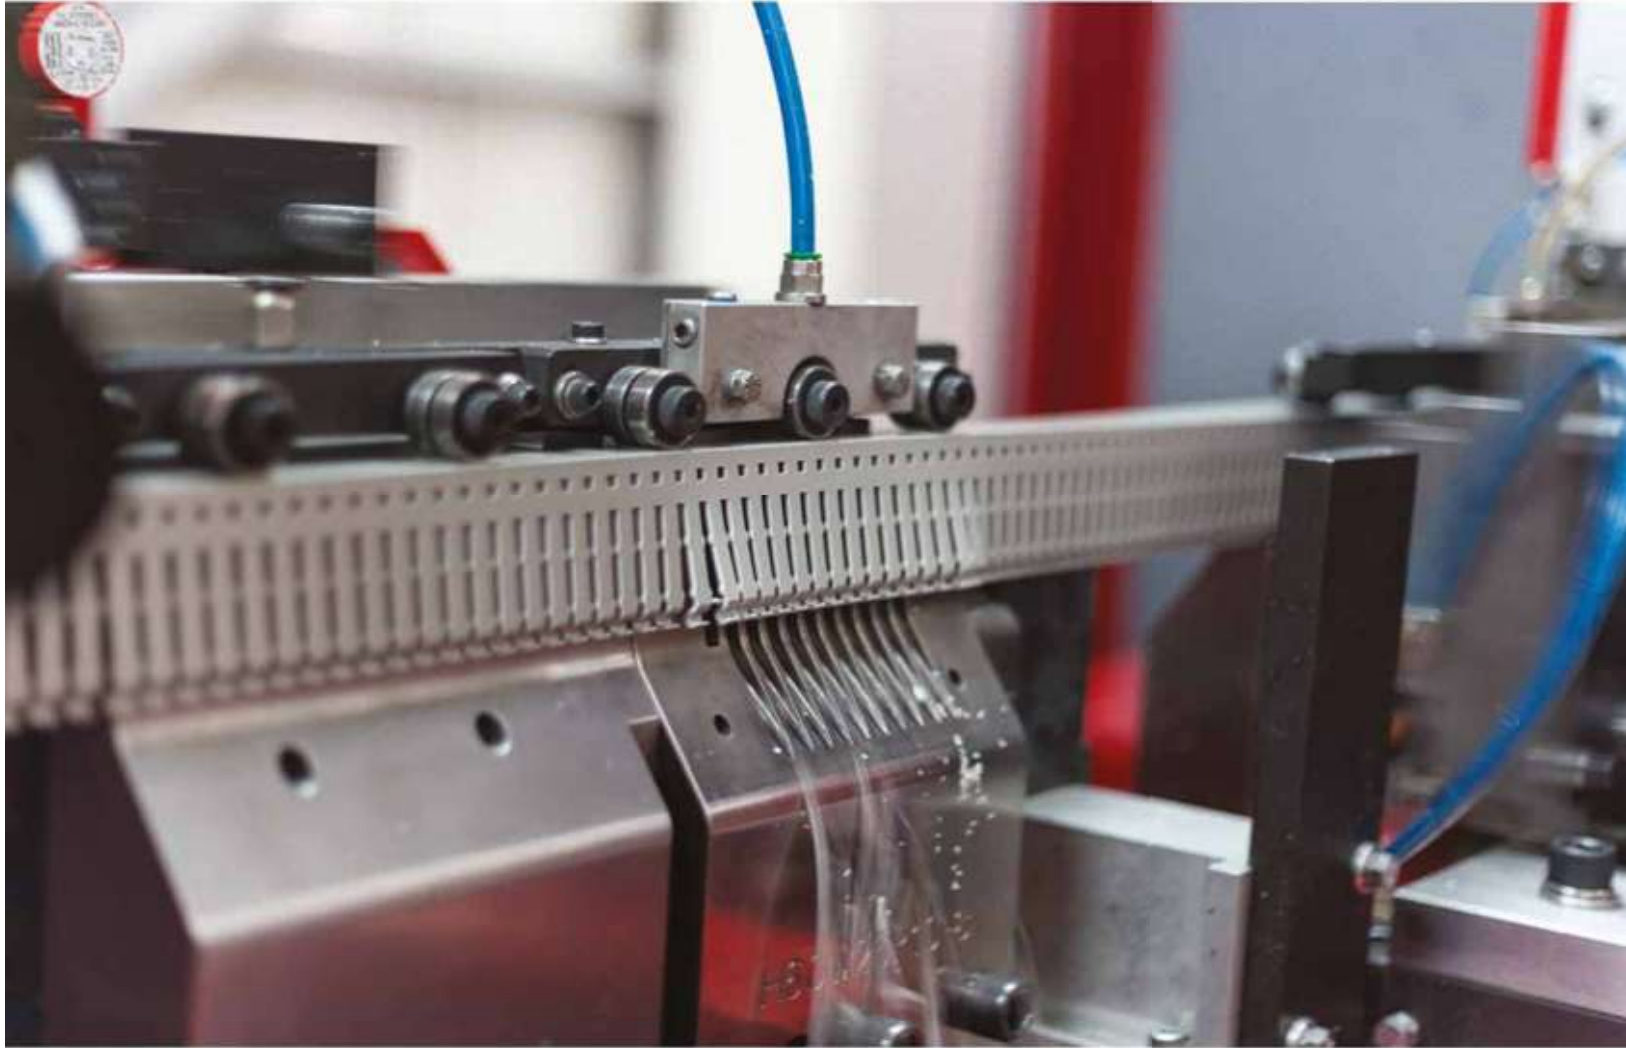

The ***fastest***
cable duct punching machine
in the world (10mt/min)



PLASTİM ELEKTRİK MALZEMELERİ İMALAT SAN. TİC. LTD. ŞTİ.

HEADQUARTERS: Perpa Elektrokent A Blok Kat: 2 No: 37 34384 Okmeydanı-İstanbul / Turkey

Tel: +90 212 210 17 10 **Fax:** +90 212 221 72 37

FACTORY 1: Alipaşa Mahallesi Boztepe Sokak No: 5 34570 Silivri-İstanbul / Turkey

FACTORY 2: İkitelli OSB Fatih Sanayi Sitesi 4A Blok No: 3-4 34306 Başakşehir-İstanbul / Turkey

From Turkey to **worldwide**

- Algeria
- Australia
- Azerbaijan
- Bosnia
- Bulgaria
- Colombia
- Croatia
- Czech Republic
- Egypt
- Finland
- Germany
- Greece
- Honduras
- Hungary
- Iceland
- Iran
- Iraq
- Ireland
- Israel
- Indonesia
- Italy
- Jordan
- Kuwait
- Latvia
- Lebanon
- Libya
- Maldives
- Mexico
- Morocco
- Netherland
- Pakistan
- Peru
- Portugal
- Poland
- Qatar
- Romania
- Russia
- Saudi Arabia
- Serbia
- South Africa
- Spain
- Switzerland
- Taiwan
- Thailand
- Tunisia
- UAE
- UK
- Ukraine
- Vietnam



www.plastim.com.tr